

VALUE

STREET LIGHT



Description

The Value Street Light is engineered for urban environments, offering exceptional performance and durability. Constructed with robust die-casting aluminium housing and protected by an anti-corrosion powder coating finish, this street light ensures long-lasting protection against harsh weather conditions. Its key features include a high lumen efficacy of 100 lm/W, providing efficient illumination while maintaining energy savings. With a lifespan of 30,000 hours @L70, this street light ensures reliable performance over extended periods. Its beam angle of 70°x140° guarantees broad and uniform light distribution, ideal for urban roads, courtyards, and traffic hubs. Designed for easy installation, the light offers an adjustable installation angle to meet specific lighting needs. With a CRI≥70, the light quality is excellent for outdoor applications, and the non-dimmable feature ensures constant illumination without fluctuations. Additionally, the Value Street Light is backed by 2 years warranty, delivering peace of mind and dependable performance.

Product Benefits

Installation Angle Adjustable
Road Lighting Distribution
Anit-corrosion

Application Areas

Suitable for Urban Roads
Courtyard Lighting
Municipal Engineering Lighting
Traffic Hubs

Product Data

General Information

Driver Included:	Yes
Lifespan:	30,000 hours @ L70
Warranty:	2 Year

Luminaire Performance

Power Consumption:	30W, 50W, 60W, 100W, 150W, 200W
Luminous Flux:	3,000 lm, 5,000 lm, 6,000 lm, 10,000 lm, 15,000 lm, 20,000 lm
Luminous Efficacy (rated):	100 lm/W
Correlated Color Temperature:	3000K, 4000K, 6500K
Color Rendering Index (CRI):	>70
Beam Angle:	70°x140°

Operating and Electrical

Input Voltage:	AC100-265V
Line Frequency:	50 or 60 Hz
Power Factor (Fraction):	>0.9
SPD:	Up to 4kV

Temperature

Operating Temperature:	-40°C – 55°C
------------------------	--------------

Controls

Controls:	On/Off
-----------	--------

Mechanical and Housing


Housing Material:	Die Casting Aluminium
Finishing:	Anti-corrosion Powder Coating
Installation:	Pole Mounted

Compliance and Certifications

Ingress Protection Code:	IP65
Protection Class IEC:	Safety Class I

Dimensions

Power Consumption:	30W / 50W / 60W	100W	150W	200W
LxWxH (mm):	485x210x70	538x238x102	602x276x105	697x311x112

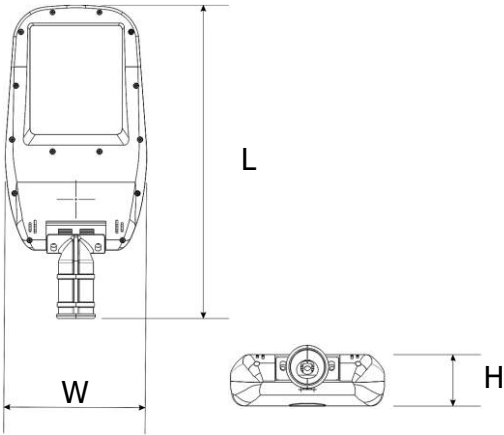

Head Office:
 192-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.

Sales Office:
 120-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.

