

SOLO II



Description

The Solo II In-ground light offers a perfect blend of subtlety and power for architectural lighting needs. Available in 2700K, 3000K, 4000K, and RGB, it caters to various lighting preferences with beam angles ranging from 12.5° to 120°, providing versatile lighting solutions. The Solo II's robust construction features a stainless-steel faceplate and a high-pressure die-cast body, treated with an electrostatic plastic coating, ensuring both durability and aesthetic appeal. With an IP67 rating, this fixture is built to endure outdoor conditions, making it ideal for pathways, building perimeters, and other outdoor spaces requiring discreet yet effective illumination. Backed by a lifespan of 50,000 hours @L70 and a up to 5 years warranty, the Solo II is a reliable choice for long-lasting outdoor lighting.

Product Benefits

Versatility and Lighting Effects
Exceptional Performance and Energy Efficiency
Innovative Design
Highly Versatile and Customized
Durability and Reliability

Application Areas

In-ground Lighting for Pathways / Building Entrances / Outdoor Spaces
Accent Lighting for Architectural Elements / Landscape Features
Subtle Lighting for Building Perimeters / Public Spaces

Product Data



General Information

Driver Included:	No
Lifespan:	50,000 hours @ L70
Warranty:	Up to 5 Year

Luminaire Performance

Power Consumption:	8W, 12W
Luminous Flux:	720 lm, 1,080 lm
Chipset Efficacy:	130 lm/w
Luminous Efficacy:	90 lm/w
Correlated Color Temperature:	2700K, 3000K, 4000K, RGB
Color Rendering Index (CRI):	>80
SDCM:	<3
Beam Angle:	8°, 12.5°, 20°, 30°, 45°, 60°

Operating and Electrical

Input Voltage:	DC24V, AC100–220V
Line Frequency:	50/60 Hz
Power Factor (Fraction):	>0.9

Temperature

Operating Temperature:	-25°C – 50°C
Ambient Humidity:	10% – 90%

Controls and Dimming

Controls:	On/Off, DMX512, PWM
Dimming:	DALI, 0-10V

Mechanical and Housing


Housing Material:	Stainless Steel Faceplate, High Pressure
	Die-casting Body, Surface with
	Electrostatic Plastic Coating
Installation:	Underground Recessed

Compliance and Certifications

Ingress Protection Code:	IP67
Impact Protection Code:	IK08
Certifications:	CE, CCC

Dimensions

Power Consumption:	8W / 12W
DxH (mm):	130x115

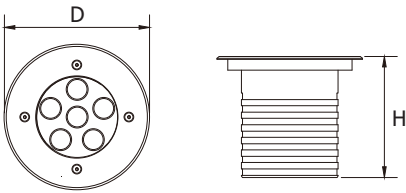

Head Office:
192-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.

Sales Office:
120-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.

