

GRAVITY

TRACKLIGHT



Description

The Gravity Tracklight is a cutting-edge lighting solution designed to offer exceptional flexibility and precision. Leveraging the latest advancements in lighting technology, this luminaire provides high-quality illumination with precise control over beam angles and light distribution. Its magnetic attachment feature ensures seamless installation and easy repositioning, granting unparalleled design freedom. This tracklight is ideal for environments where lighting needs to frequently adapt, such as retail spaces, galleries, or modern office settings. By combining sleek design with advanced functionality, the tracklight delivers a versatile and visually appealing lighting experience tailored to your specific requirements. It is available with a range of control options, including TRIAC, DALI, and 0-10V, it offers versatile and precise illumination control. Operating at 48 VDC with an SDCM <3, it ensures consistent and high-quality light output.

Product Benefits

Sleek & Modern Design
Energy Efficient
Customizable Lighting Options
Complies with International Standards
Long Lifespan with Branded Components
High Visual Comfort

Application Areas

Display Lighting
Accent Lighting
Galleries / Boutiques
Residential Interiors
Hospitality Spaces

Product Data



General Information

Driver Included:	No
Lifespan:	50,000 hours @ L70
Warranty:	Up to 5 Year

Luminaire Performance

Power Consumption:	10W, 20W
Luminous Flux @3000K:	800 lm, 1,600 lm
Chipset Efficacy:	140 lm/W
Luminous Efficacy @3000K:	80 lm/W
Correlated Color Temperature:	2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI):	>90
SDCM:	<3
Beam Angle:	24°

Operating and Electrical

Input Voltage:	48 VDC
----------------	--------

Temperature

Operating Temperature:	-20°C – 45°C
------------------------	--------------

Controls and Dimming

Controls:	On/Off
Dimming:	TRIAC, DALI, 0-10V

Mechanical and Housing


Housing Material:	Aluminium and Plastic
Housing Finish:	Black
Trim Finish:	Black
Optic Finish:	Gun Black
Finishing:	Powder Coated
Installation:	Magnetic Track

Compliance and Certifications

Ingress Protection Code:	IP20
Impact Protection Code:	IK02
Protection Class IEC:	Safety Class III
Certifications:	CB & CE: IEC 60598-1, IEC 60598-2, IEC 61347-1, IEC 61347-2-13, IEC 62031, IEC 62471, IEC 62493
	EMC: IEC 55015, IEC 61000-3-2, IEC 61000-3-3, IEC 61547
	LVD:IEC 60598-1 and IEC 61347-1
	RoHS

Dimensions

Power Consumption:	10W	20W
DxH (mm):	45x100	55x120

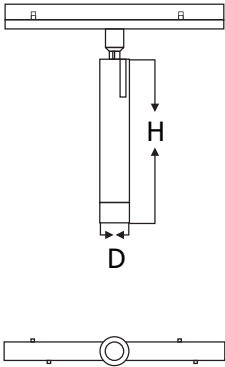

Head Office:
192-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.

Sales Office:
120-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.

