

VALUE

DOWNLIGHT PRO



Description

The Value Downlight Pro is designed to deliver a uniform and comfortable lighting experience, making it an ideal choice for both residential and commercial spaces. This versatile downlight features a 3CCT switch, allowing users to easily select from various color temperatures to suit their specific needs. With a lifespan of 40,000 hours @L70, it ensures long-lasting performance and reliability. Installation is a breeze, making it a convenient addition to any space. The Value Downlight Pro not only enhances your lighting but also significantly saves energy costs by up to 70%. Backed by a warranty of up to 3 years, this downlight offers peace of mind and exceptional value.

Product Benefits

Up to 70% Savings in Energy Costs
Dimming Capability, Light Uniformity and Sight Advantage
High Luminous Efficacy
Long Life Span

Application Areas

Offices / Banks
Residential
Retail
Hospitals

Product Data

General Information

Driver Included:	Yes
Lifespan:	40,000 hours @ L70
Warranty:	Up to 3 Year

Luminaire Performance

Power Consumption:	10W, 20W
Luminous Flux:	940 lm, 1,930 lm
Luminous Efficacy (rated):	Up to 96 lm/W
Correlated Color Temperature:	3CCT (3000K, 4000K, 5700K)
Color Rendering Index (CRI):	>80
Beam Angle:	90°

Operating and Electrical

Input Voltage:	AC220-240V
Line Frequency:	50 or 60 Hz
Power Factor (Fraction):	>0.9
SPD:	Up to 2kV

Temperature

Operating Temperature:	-20°C – 45°C
------------------------	--------------

Controls and Dimming

Dimming:	TRIAC
----------	-------

Mechanical and Housing


Housing Material:	Plastic Coated Aluminium
Optical Cover Material:	Diffuser
Installation:	Recessed

Compliance and Certifications

Ingress Protection Code:	IP40
Protection Class IEC:	Safety Class II

Dimensions

Power Consumption:	10W	20W
C, DxH (mm):	90, 115x61	200, 225x84

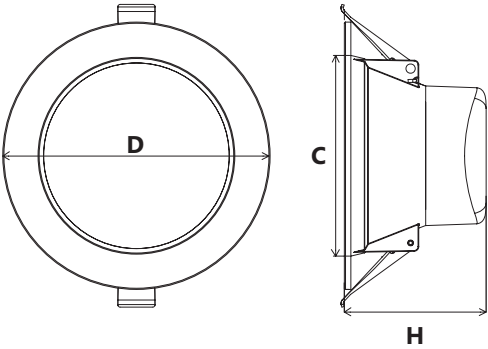

Head Office:
192-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.

Sales Office:
120-Y Block, Commercial Area, Phase III, DHA Lahore, Pakistan.



MRK/PM/PS/VDP/24/01