

Cable - General Wire

Cable Description: 1 X 1.5 MM2 SOLID CU LSZH GREEN : 450/750 V BSEN50525 : INSULATION

Design and Construction Data

Reference Manufacturing Standards	IEC 60228 , BS EN 50525	
Max. Permissible Continuous Conductor Temp	°C	90
Max. Conductor Short Circuit Temp for 5 Seconds	°C	160
Rated Voltage ' Uo / U '	V	450/750
Number of Conductors x Cross-Section	mm ²	1 x 1.5
Conductor Material & Shape	Copper & Solid Class 1	
Insulation Material	LSZH	
Insulation Nominal Thickness	mm	0.70
Insulation Color	Green	
Approximate Cable Overall Diameter	mm	2.60- 3.30
Approximate Cable Weight	Kg/km	21.114


Electrical Data

Max Conductor DC resistance @ 20 °C	ohm/km	12.10
Min Insulation Resistance at 90°C	M ohm.km	0.011
High Voltage Test at 2.5kV for 5 min	No Breakdown Shall Occur	
Current Carrying Capacity		
Laid in Free air @ 30 °C Ambient Temperature	Amp	
Conduit on wall or in Trunking	Amp	17.5
Direct in Ground or Ducting in Ground @20 °C	Amp	-
Minimum Bending Radius	mm	-
The Cable shall meet all Test requirements	IEC 60228 , BS EN 50525	

Cable Marking

1x1.5mm ² SOLID CU/LSZH ELECTRIC CABLE 450/750 V BS EN 50525 FAST CABLES LTD Y.O.M

Cable Drawing

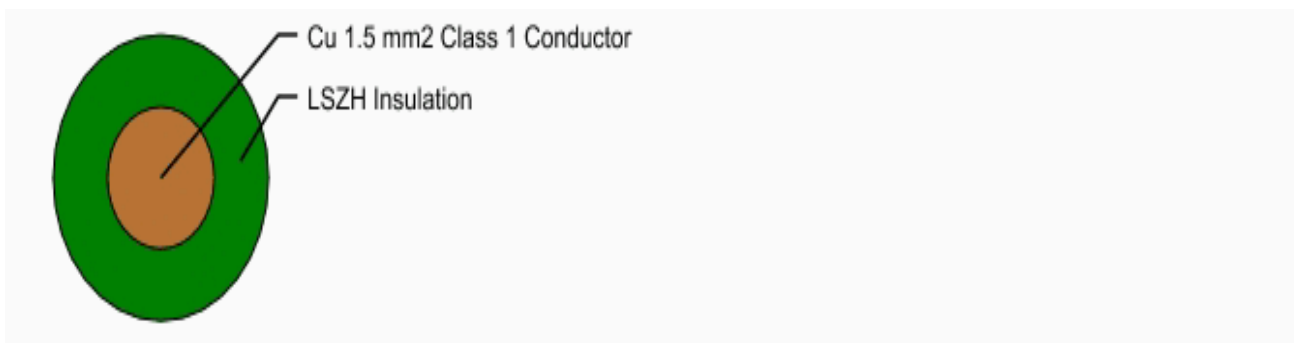

1 X 1.5 MM2 SOLID CU LSZH GREEN : 450/750 V BSEN50525 : INSULATION	Approx. Diameter	
Solid Copper Conductor with round shape	mm	1.38
Insulated	mm	2.60- 3.30